MW06 WALL TOP ASSEMBLY

meir.




FEATURES

- Refer to the Meir website for warranty terms & conditions.
- 1/4 turn 85mm ceramic spindle
- Flow rate 20 l/min
- Solid brass construction
- Required Parts MSABR00/MP13
- Box Weight 0.6Kg

CARE

- Do not install tapware using any form of acetone silicones.
- Do not apply physical items (such as tools)directlytoproduct.
- Never use house-hold or commercial detergents, citrus based cleaners, or abrasive cleaners.
- Clean using a mild washing soap solution rinsed, and dry with a soft cloth.
- Check for any product defects before installation.
- Refer to the installation manual for correct installation.


FLOW RATE GRAPH

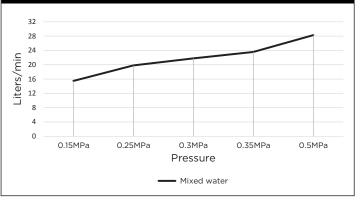


CREDENTIALS

• Watermark AS/NZS 3718 WMKA 20374

SPECIFICATIONS

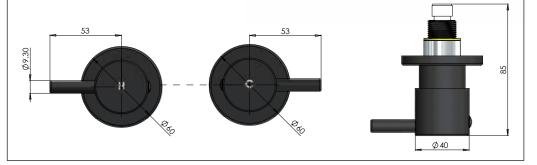

TOLERANCE

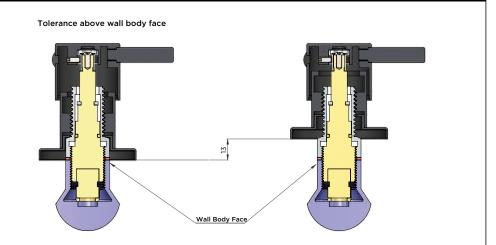

EXPLODED VIEW

