


Round Shower Bracket

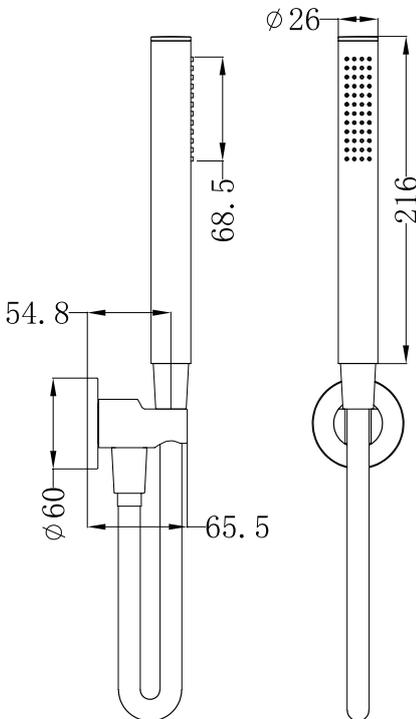

SPECIFICATION

WELS RATING	4STAR 7.5L/MIN
WATERMARK LICENSE	WM-060093
TEMPERATURE RATING	MIN 1°C-MAX 75°C
PRESSURE RATING	MIN 150KPa-MAX 500KPa

AVAILABLE FINISH

	CHROME NR307CH		MATTE BLACK NR307MB
	BRUSHED NICKEL NR307BN		GUN METAL NR307GM
	BRUSHED GOLD NR307BG		BRUSHED BRONZE NR307BZ

MAINTENANCE AND CARE

All surfaces should be cleaned with mild liquid detergent or soap and water. Do not use cream cleaners or citrus based cleaning products, as they are abrasive. Use of unsuitable cleaning agents may damage the surface. Any damage caused in this way will not be covered by warranty.

PACKING INCLUDES

- 1x hand shower (built-in check valve)
- 1x 1.5m hose
- 1x bracket

Dimensions are nominal measurements only.



Versions: V1

Installation Instruction


Important

All products must be installed by licensed plumbers.

All pipework must be thoroughly flushed prior to installation, as foreign materials may block the flow regulating device and reduce the flow of water.




1. Apply thread sealant or teflon tape on the outlet thread.




2. Put washer into bracket body.

Apply thread sealant or teflon tape



3. Pull back plate onto the outlet, and screw shower bracket body onto outlet.

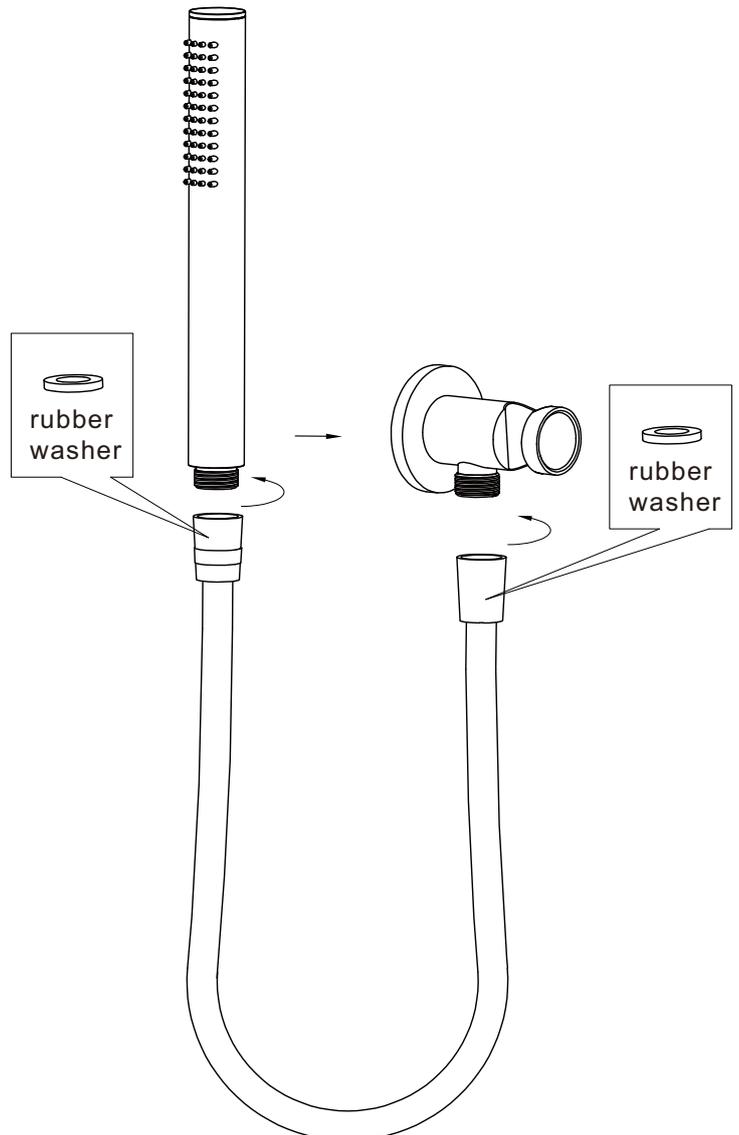

4. Connect bracket and hand shower with hose. TEST & CHECK FOR LEAKS.